

DATA COMMUNICATION QUALITY CONTROL SYSTEM, TRANSMITTER SYSTEM AND RECEIVER

Publication number: WO0232083

Publication date: 2002-04-18

Inventor: NARUSE TETSUYA (JP)

Applicant: SONY CORP (JP); NARUSE TETSUYA (JP)

Classification:

- International: H04L1/00; H04L1/18; H04L5/14; H04L12/56; H04L27/26; H04Q7/38; H04Q7/32; H04L1/00; H04L1/16; H04L5/14; H04L12/56; H04L27/26; H04Q7/38; H04Q7/32; (IPC1-7): H04L29/08; H04L12/56; H04Q7/38

- European: H04Q7/38C8; H04L1/00A1M; H04L5/14R3; H04L12/56B; H04W28/18

Application number: WO2001JP08996 20011012

Priority number(s): US20000240182P 20001013

Also published as:

EP1237345 (A1)
EP1233594 (A1)
WO0232175 (A1)
WO0232082 (A1)
JP2007251978 (A)

more >>

Cited documents:

JP11355854
JP11098128
JP11355263
JP7170290
JP11187367

more >>

Report a data error here

Abstract of WO0232083

An optimum communication quality in accordance with the type of data can be ensured between a transmitter system and a receiver. In a radio communication system (1) that controls the data communication quality between a transmitter system (2) that transmits contents and a mobile radio terminal (8) that receives the contents from the transmitter system (2) via a predetermined transmission path (15), the transmitter system (2) switches modulation methods in a data transmitting unit (13) in accordance with the type of the contents to be transmitted to the mobile radio terminal (8), thereby controlling the data communication quality between the transmitter system (2) and the mobile radio terminal (8). In this way, a data transmission from the transmitter system (2) to the mobile radio terminal (8) can be performed with a required data communication quality maintained by a modulation method that is the most suitable for the type of the contents.

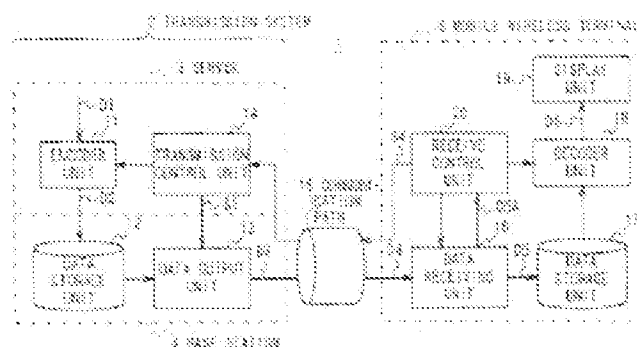


FIG. 2

Data supplied from the esp@cenet database - Worldwide

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2002年4月18日 (18.04.2002)

PCT

(10) 国際公開番号
WO 02/32083 A1

(51) 国際特許分類: H04L 29/08, 12/56, H04Q 7/38

(72) 発明者: および

(21) 国際出願番号: PCT/JP01/08996

(75) 発明者/出願人 (米国についてのみ): 成瀬哲也
(NARUSE, Tetsuya) [JP/JP]; 〒141-0001 東京都品川区
北品川6丁目7番35号 ソニー株式会社内 Tokyo (JP).

(22) 国際出願日: 2001年10月12日 (12.10.2001)

(25) 国際出願の言語: 日本語

(74) 代理人: 弁護士 田辺恵基 (TANABE, Shigemoto); 〒
150-0001 東京都渋谷区神宮前1丁目11番11-508号 グ
リーンファンタジアビル5階 Tokyo (JP).


(26) 国際公開の言語: 日本語

(30) 優先権データ:
60/240,182 2000年10月13日 (13.10.2000) US(81) 指定国 (国内): AE, AG, AI, AU, BA, BB, BG, BR, BZ,
CA, CN, CO, CR, CU, CZ, DM, DZ, EC, EE, GE, GR, HR,
HU, ID, IL, IN, IS, JP, KR, KZ, LC, LK, LR, LT, LV, MA,
MG, MK, MN, MX, NO, NZ, PH, PL, RO, SG, SI, SK, TT,
UA, US, UZ, VN, YU, ZA.(71) 出願人 (米国の除外する全ての指定国について): ソニー株
式会社 (SONY CORPORATION) [JP/JP]; 〒141-0001
東京都品川区北品川6丁目7番35号 Tokyo (JP).

(続票有)

(54) Title: DATA COMMUNICATION QUALITY CONTROL SYSTEM, TRANSMITTER SYSTEM AND RECEIVER

(54) 発明の名称: データ通信品質制御システム、送信システム及び受信機

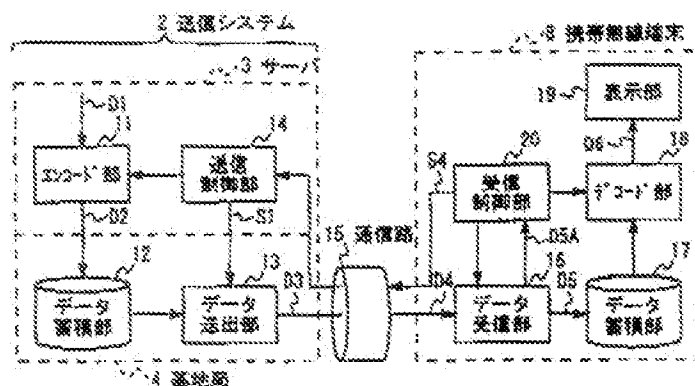

- 2...TRANSMITTER SYSTEM
3...SERVER
11...ENCODER UNIT
12...DATA STORING UNIT
14...TRANSMISSION CONTROL UNIT
13...DATA TRANSMITTING UNIT
4...BASE STATION
15...TRANSMISSION PATH
8...MOBILE RADIO TERMINAL
20...RECEPTION CONTROL UNIT
16...DATA RECEIVING UNIT
19...DISPLAY UNIT
18...DECODER UNIT
17...DATA STORING UNIT

(57) Abstract: An optimum communication quality in accordance with the type of data can be ensured between a transmitter system and a receiver. In a radio communication system (1) that controls the data communication quality between a transmitter system (2) that transmits contents and a mobile radio terminal (8) that receives the contents from the transmitter system (2) via a predetermined transmission path (15), the transmitter system (2) switches modulation methods in a data transmitting unit (13) in accordance with the type of the contents to be transmitted to the mobile radio terminal (8), thereby controlling the data communication quality between the transmitter system (2) and the mobile radio terminal (8). In this way, a data transmission from the transmitter system (2) to the mobile radio terminal (8) can be performed with a required data communication quality maintained by a modulation method that is the most suitable for the type of the contents.

(続票有)

WO 02/32083 A1